

TECHNICAL DATA SHEET



KRASO® Swan Neck - galvanised -

Flat roof penetration

- Integration in the roof sealing sheeting using **KRASO®** Foil Clamping Flange Type FKF: oil- and bitumen resistant, tested water pressure tightness up to 2,5 bar.
- UV protection with peripheral drip edge on the underside and anti-twist lock.
- We can adjust the type of sealing sheets or foils: e.g. Thermofol U15, FPO, RESITRIX®, PP, PE, **KRASO®**-Fol, PYE-PV 200 S5 etc.uvm.

Scope of supply

- **KRASO®** Swan Neck - galvanised – incl. EPDM seal for foot seal of the roof opening
- **KRASO®** Foil Clamping Flange Type FKF with Torque Control Nut **KRASO®** DKM, oil- and bitumen resistant, UV protection with peripheral drip edge on the underside and anti-twist lock, fastening dowels M8 x 100 V2A, adhesive and sealant **KRASO®** PU 50

Material	Color
- Swan Neck / base plate	Thin sheet metal galvanised / silver
- UV-protection / anti-twist-lockbeige	PP (Polypropylen) / beige
- Foot sealing	EPDM (Ethylen-Propylen-Dien; M-group) / black
- Typ FKF	EPDM sealing 30 mm / black Stainless steell V2A Torque Control Nut KRASO® DKM / black - red
TEST CERTIFICATE	download area

Features


- UV protected
- Can be swivelled by 360°
- Stainless steel
- Anti twist lock

TECHNICAL DATA SHEET



KRASO® Swan Neck - galvanised -

Technical Details

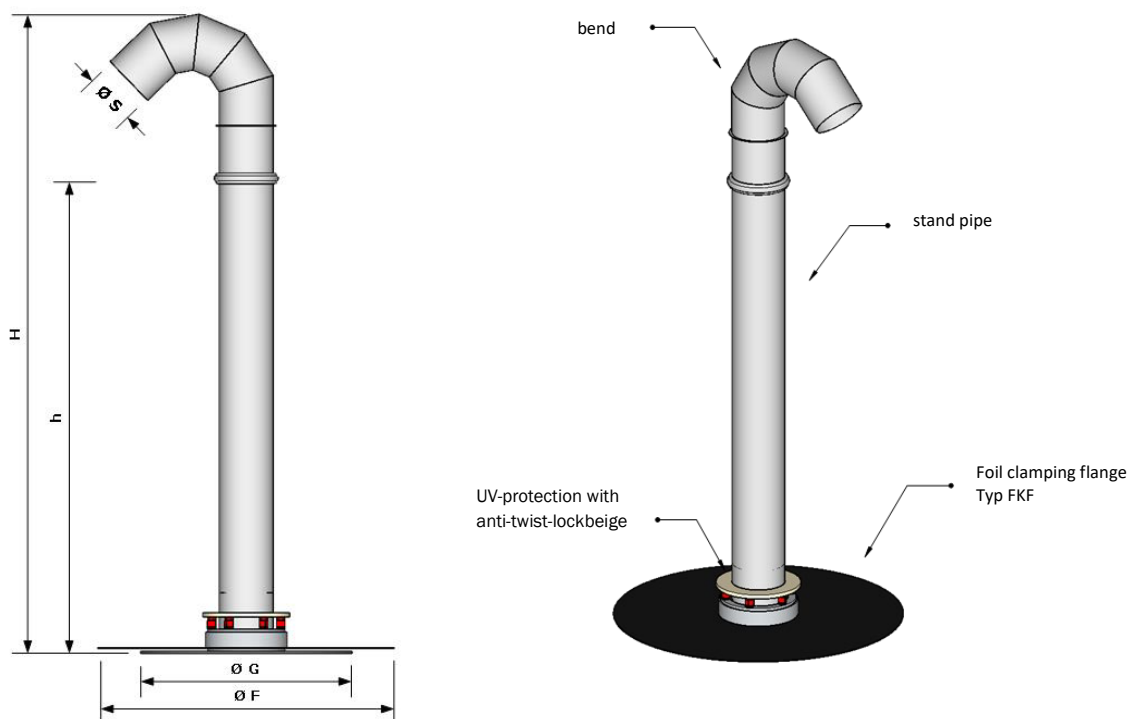

Nominal width NW		100	150	200	300
Ø Swan neck	Ø S	101	151	201	301
Ø Foil clamping flange	Ø F	700	740	800	900
Ø base plate	Ø G	400	450	500	600
Height stand pipe	h	995			
Total height	H	1360	1435	1520	1675

All dimensions in mm are approx.