

TECHNICAL DATA SHEET



KRASO® Floor Drain Type FS - KG 2000 - frost proof

Application areas

Floor drain for the drainage of grey water. According to DIN EN 1253 for the installation in exterior areas without traffic.

Material

Body	PP (full wall material)
4 Seal	TPE
Foil flange	EPDM
Insert frame	PP
Grate	Stainless steel
Lip seal	SBR

Tests


- Radon-tight: protects against a harmful concentration of the radioactive noble gas.
- Dimensionally and pressure resistant solid wall material: low abrasion, easy installation at low temperatures.
- Temperature resistance from -20°C to 90°C.
- In accordance with DIN EN 1253
- MPA-tested up to 10 bar
- Drainage capacity 1,67 l/s
- Load class K3
- optionally available with KRASO® Foil Flange, oil- and bitumen resistant

Test certificates [In our download area](#)

Product image



Technical drawing

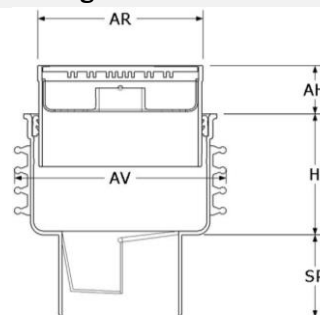

Type FS – KG 2000

H Body height	108
SP Spigot (mm)	73
AH Insert frame height (mm)	30 - 70
AR Insert frame (mm)	150 x 150
AV Ø 4 Seal external (mm)	188
Weight (kg)	1,7
Item no.	K2BAFS
Pipe connection Ø	DN 110

Dimensional and weight data without guarantee • Variations in colour possible between the illustrated product and the product supplied • Technical subject to afternoon • All rights to the drawings and designs are the property of KRASO GmbH Co. KG • The copying and distribution of drawings and other use requires our written consent.

iwings

TECHNICAL DATA SHEET




KRASO® Floor Drain Type FS - KG 2000 - frost proof

Product image



Technical drawing

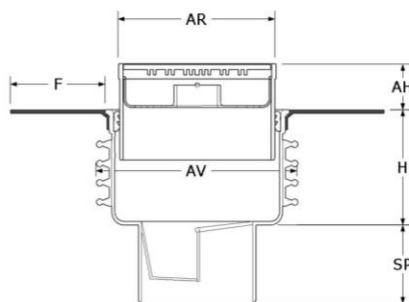

Type FS – KG 2000 with foil flange

H Body height	108
SP Spigot (mm)	73
AH Insert frame height (mm)	30 – 70
AR Insert frame (mm)	150 x 150
AV Ø 4 Seal external (mm)	188
F Foil flange (mm)	approx. 150
Weight (kg)	2,3
Item no.	K2BAFSF
Pipe connection Ø	DN 110